


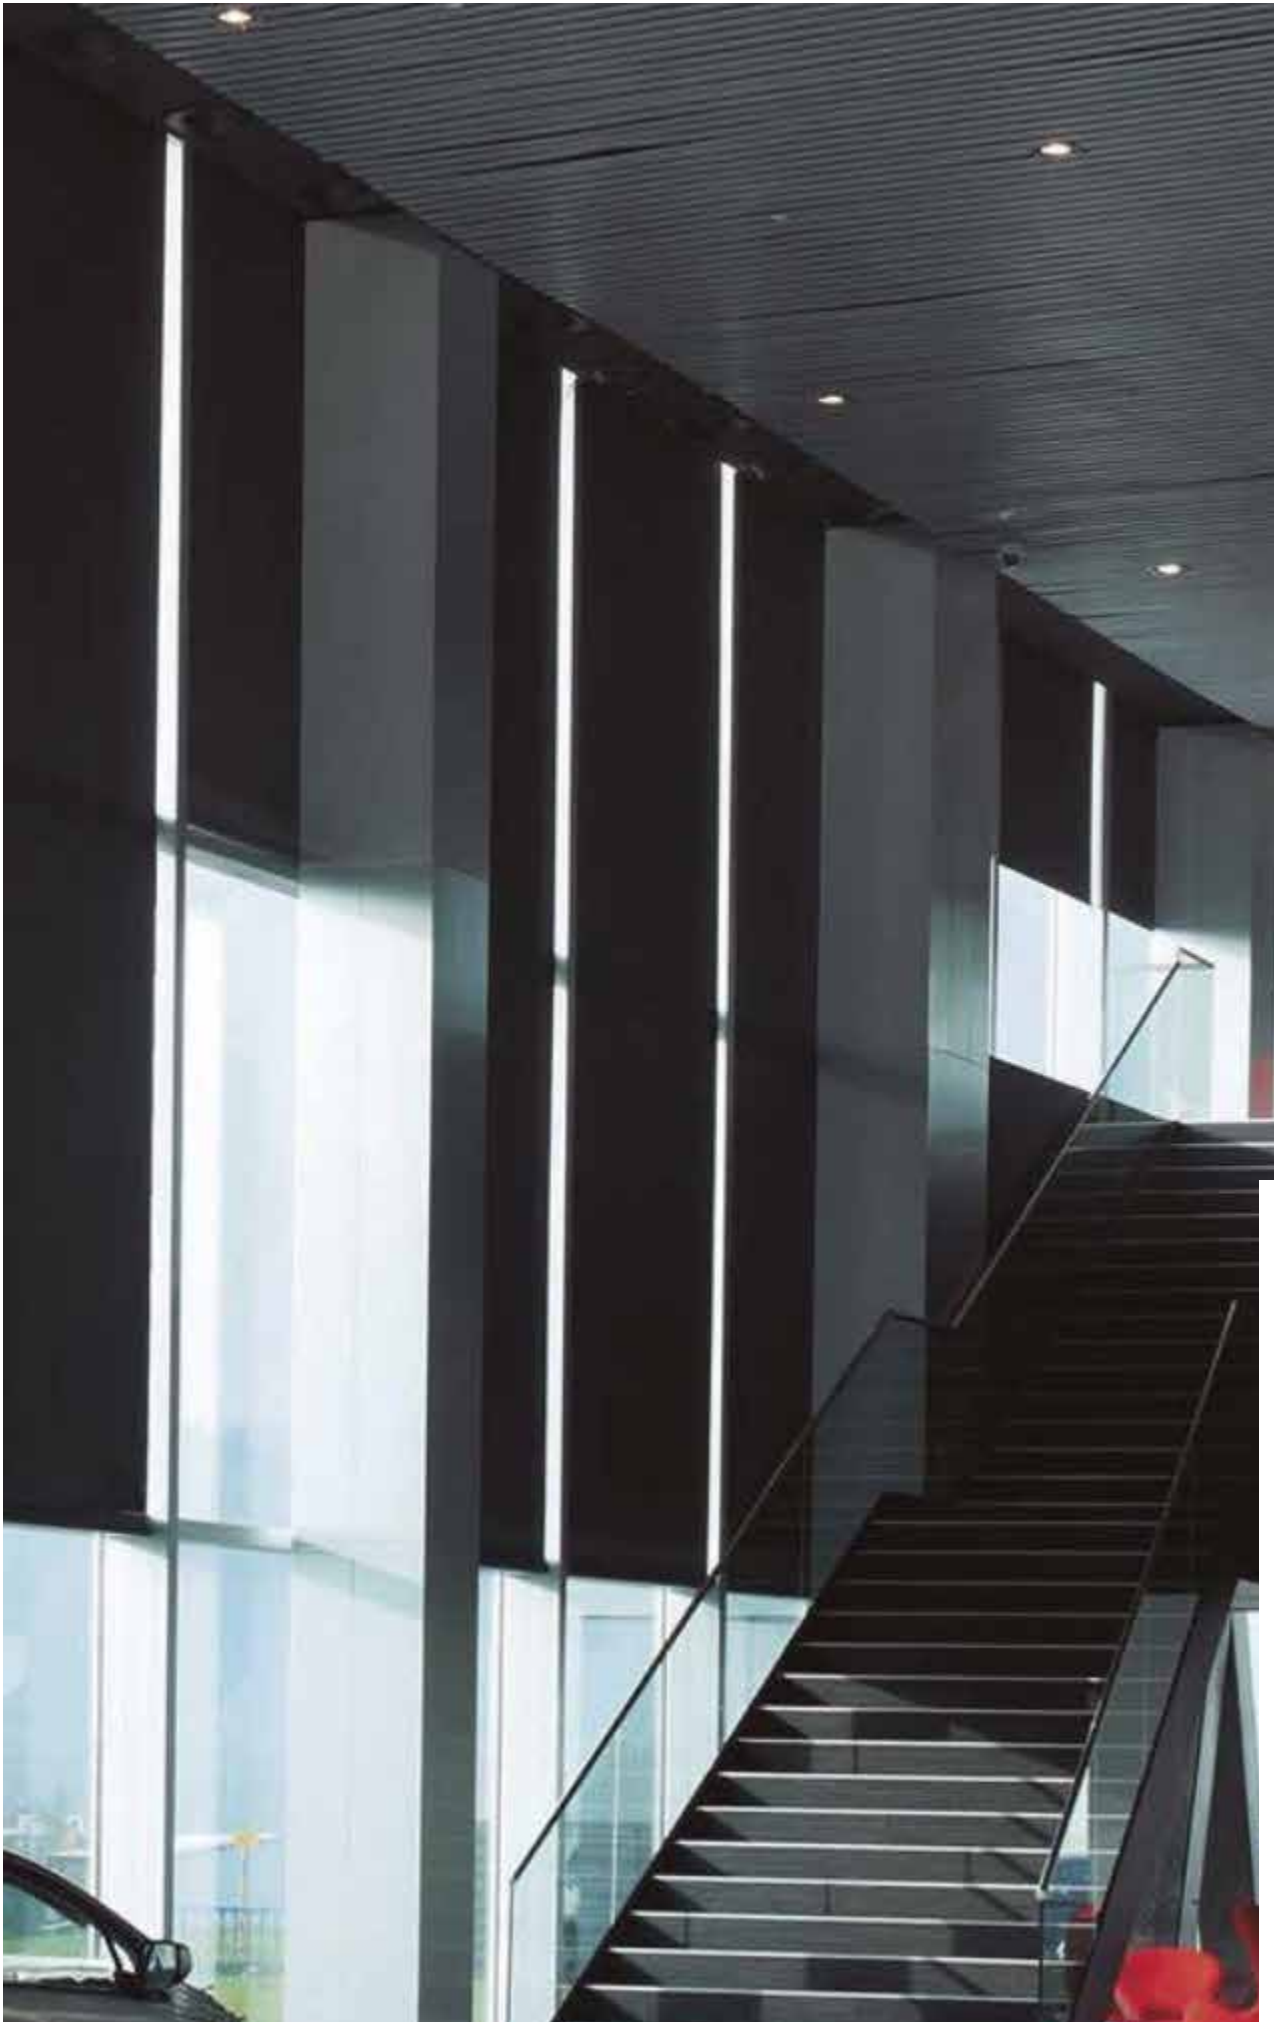

SOLO BLACKOUT

TECHNICAL SPECIFICATIONS

Composition 100% PES
Weight 350 g/m² (±5%) | 10.3 oz/yd² (±5%)
Thickness 0.46 mm (±5%) | 0.018 in (±5%)
Roll Width 3.0 m | 118 in
Roll Length 30 m | 32.81 yd
UV Blockage 100%
Light Fastness <6 Xenotest Grade
Mesh (in) Wrap: 101 | Fill: 56
Flame Retardant NFPA 701

CLEANING AND MAINTENANCE

Vacuum clean for regular maintenance.
Do not use soap solutions nor a damp cloth
Do not wash
Do not wring dry.
Do not bleach.
Do not dry clean nor use steam cleaning.




OPTICAL PROPERTIES

UV Blockage 100%

CERTIFICATES



SOLO BLACKOUT

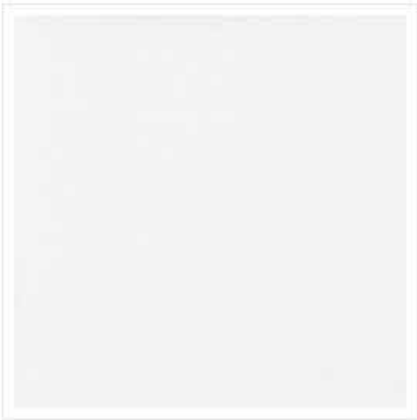

0-002-61-01118
White



0-002-61-03118
Ivory



0-002-61-04118
Sand



0-002-61-05118
Pearl Grey



0-002-61-06118
Mushroom



0-002-61-08118
Chocolate



0-002-61-09118
Black



0-002-61-10118
Light Grey



0-002-61-11118
Dark Grey

