
 **SHADES BY MATISS**

ASENZA

BLACKOUT FABRIC



ASENZA

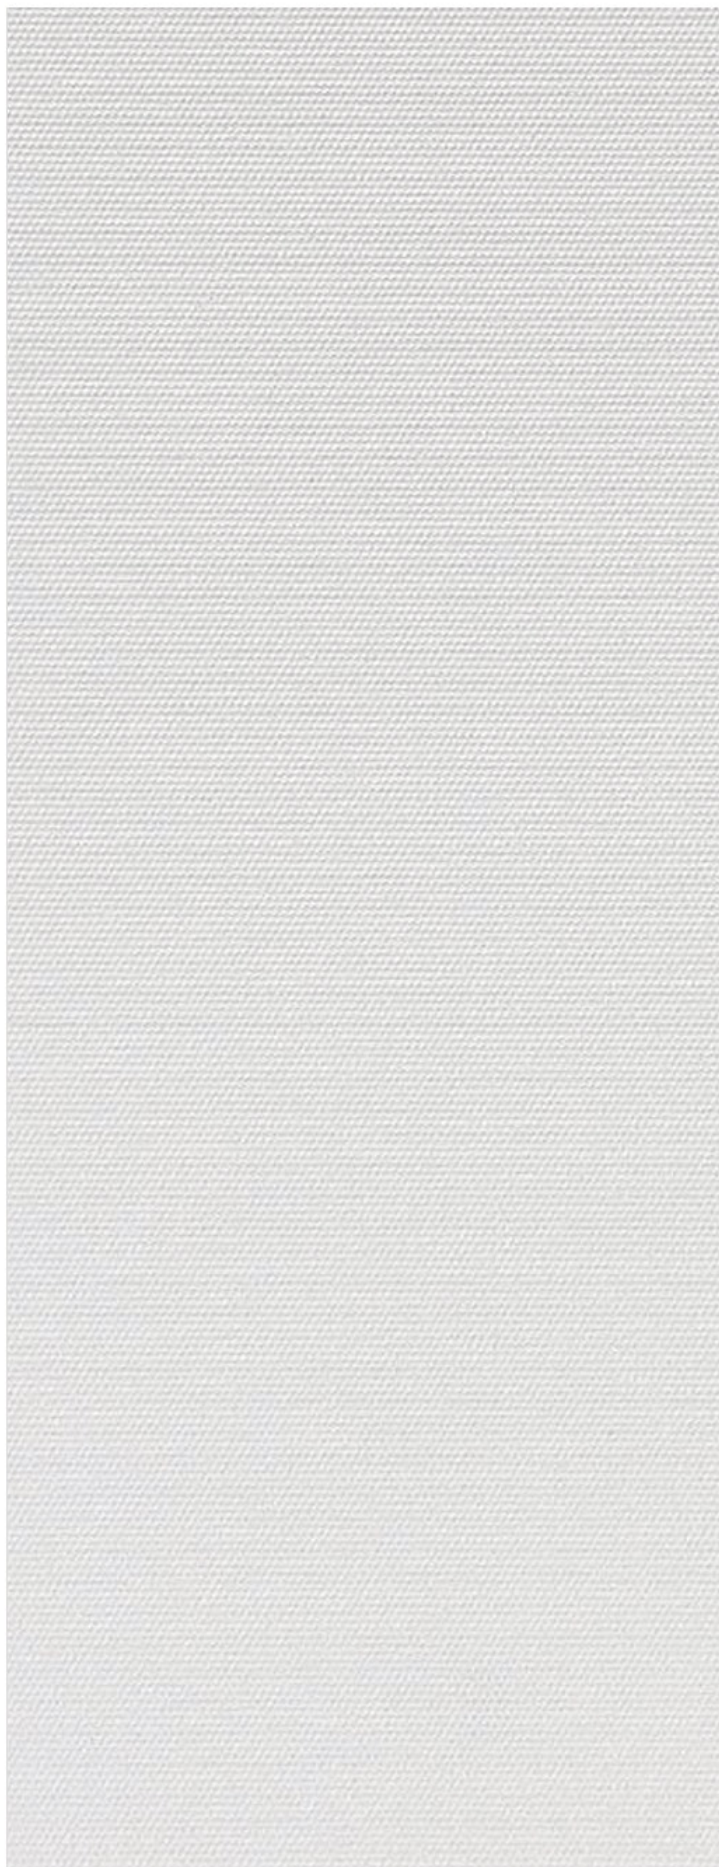


IVORY




LINEN



LIGHT GREY

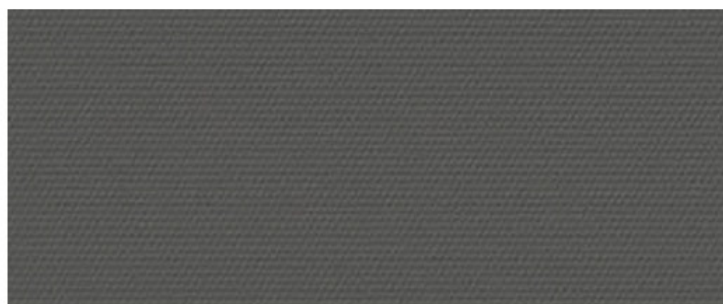

SLATE

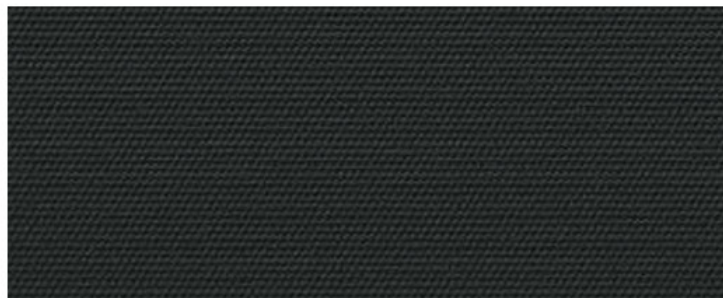

SPECIFICATION

ASENZA BLACKOUT

Composition	100% Polyester with Acrylic foam back coating	Fabric Weight	12.09 oz/sqyd (410 gsm) +/-5%
Standard Roll Length	30 yds (28m)	Fabric Thickness	0.017" (0.45mm) +/-5%
Fabric Width	98.4"(250cm), 118"(300cm)	Acoustic	NRC 0.00 SAA 0.03

		TS	RS	AS	TV	RV	AV	TUV	SC Single Glass			SC Insulating Glass		
									1/8"CL	1/4"CL	1/4"HA	1/2"CL	1"CL	1"HA
100	White	0	66	34	0	77	23	0	0.29	0.30	0.30	0.28	0.29	0.24
101	Ivory	0	68	32	0	79	21	0	0.28	0.28	0.29	0.27	0.28	0.23
102	Linen	0	67	33	0	78	22	0	0.28	0.29	0.29	0.28	0.29	0.23
103	Light Grey	0	66	34	0	77	23	0	0.29	0.30	0.30	0.28	0.29	0.24
104	Slate	0	70	30	0	80	20	0	0.26	0.27	0.28	0.26	0.27	0.23
105	Eclipse	0	68	32	0	79	21	0	0.28	0.28	0.29	0.27	0.28	0.23

TS = Solar Transmittance
RS = Solar Reflectance

AS = Solar Absorptance
TV = Visual Transmittance

1/8" CL = 1/8" Clear Glass
1/4" CL = 1/4" Clear Glass

1/4" HA = 1/4" Heat Absorbing Glass
*SIDE: FRONT (BACK)

Fire Classifications

NFPA701-2019 TM#1

Rail Road

Not Recommended

Color Fastness to Light

Grade ≥ 6, ISO 105-B02:2014 Method 3

Fabrication Methods

Cutting: Cold, Ultrasonic, Crush or Laser Cut

Welding: Thermal, High-Frequency, or sewing

Acoustical Performance

ASTM C423

Environmental

GreenGuard, GreenGuard Gold, RoHS-Lead Free

Care & Cleaning

Dust removal with vacuum, compressed air or soft brushing.
Do not scrub. Wipe clean with sponge using clean water.



• ENERGY SAVING • • PRINTABLE • • FIRE RETARDANT • • PVC FREE • • LEAD FREE • • NOISE REDUCTION •