


SBM NeoTrack™ Manual Drapery Track

Part of the NeoRoll product line. Recessed ceiling mount curtain track system

A hand operated curtain track for pleat, wave, and ripple fold drapery. It mounts with a ceiling only bracket, or a ceiling plus wall bracket for recessed pocket applications. Tracks run straight or curved, with center or split rail opening.

OPERATION	WIDTH RANGE	MAX CURTAIN WEIGHT	CURVE RADIUS
Hand operated	400 to 10,000 mm	25 kg (straight)	200 mm min.

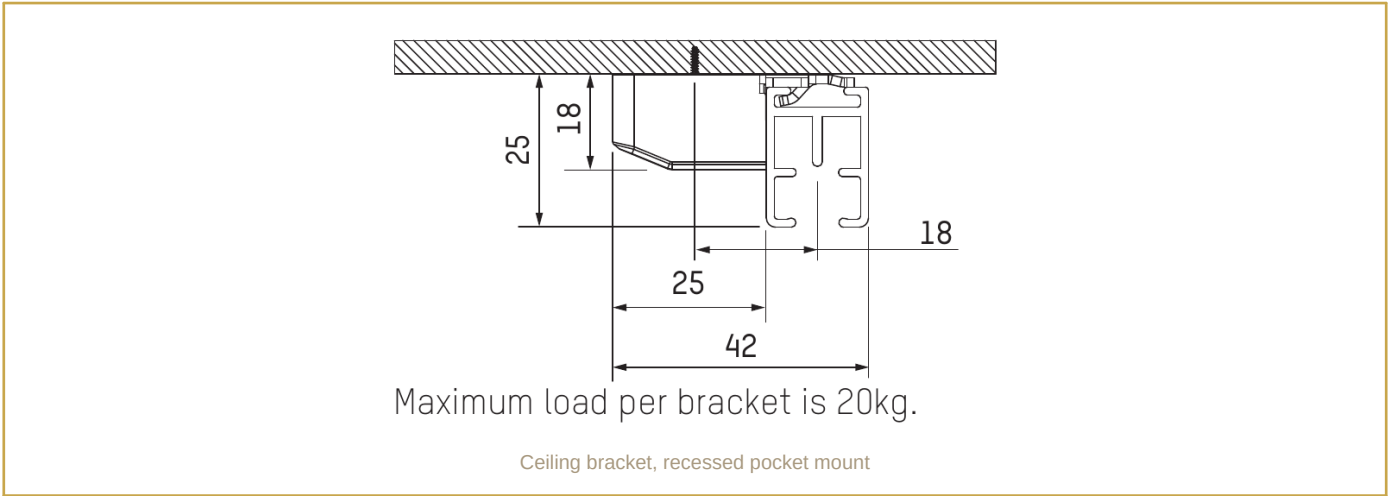

BEST-USE APPLICATIONS

- Multifamily amenity and residential spaces
- Hospitality and guest rooms
- Offices and conference rooms
- Recessed ceiling pockets

KEY BENEFITS

- Straight or curved runs down to a 200 mm radius
- Center or split rail opening
- Dual track wall bracket for layered drapery
- Works with pleat, wave, and ripple fold gliders

Packside weight at any stack position must not exceed the installed brackets' combined load rating. Add brackets where the calculated packside weight runs over.

SBM NEOTRACK MANUAL DRAPERY TRACK, TECHNICAL DATA

Bracket and mounting dimensions


CEILING AND WALL BRACKETS

BRACKET	KEY DIMENSIONS	MAX. LOAD
Ceiling bracket	18 mm / 25 mm / 42 mm mounting profile	20 kg
Wall bracket, option 1	85 to 93 mm projection, 48 mm drop	18 kg
Wall bracket, option 2	100 to 108 mm projection, 48 mm drop	15 kg
Dual track wall bracket	43 to 136 mm projection range, 48 mm drop	2 x 6 kg

RAIL AND CURTAIN CAPACITY

RAIL CONFIGURATION	MAX. CURTAIN WEIGHT
Straight rail	25 kg
Single curve	20 kg
Two curves	15 kg

MECHANICAL DRAWING, WALL BRACKET OPTIONS (MM)

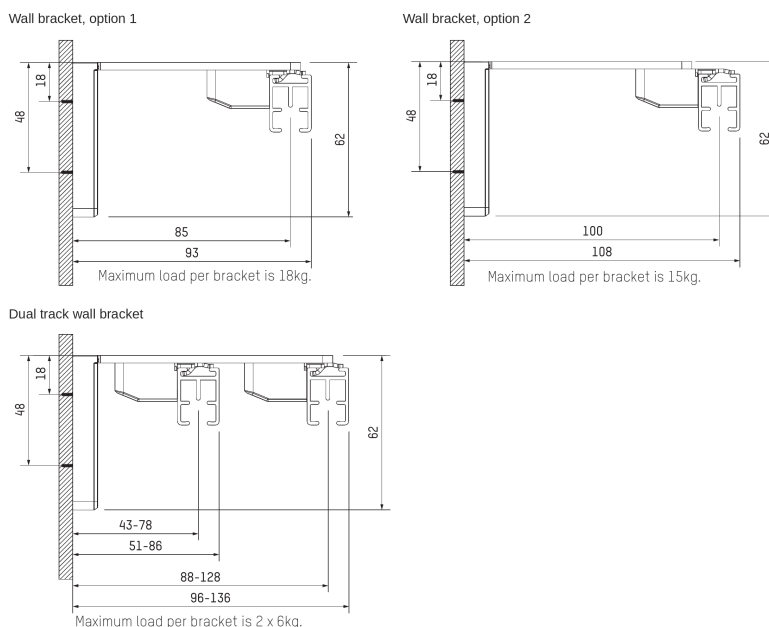

ORDERING AND INSTALLATION NOTES

- Specify ceiling only or ceiling plus wall bracket mounting for the recessed pocket.
- Curved sections need a minimum 200 mm radius and at least 600 mm between two curves.
- The dual track wall bracket holds two tracks side by side for layered drapery.