



TEXTILENE NANO 55/EXTERIOR SCREEN



TEXTILENE® nano™ 55




Black
T18FFS003 x 120"
T18FFS010 x 126"



White
T18FFS006 x 120"
T18FFS011 x 126"

Attribute	ASTM	Warp	Fill	Typical
Construction, end/inch	D3775-12	17.0 ±0.5	17.0 ±0.5	
Weight, oz/yd²	D3776-09	-	-	7.1
Weight, g/m²	D3776-09	-	-	240.7
Tensile Strength (grab), lbf /daN	D5034-09	273.3 / 121.6	339.4 / 151	
Tensile Strength (strip), lbf /daN	D5035-11	100.9 / 44.9	116.1 / 51.6	
Tear Strength (trapezoidal), lbf /daN	D5733	28.2 / 12.5	25.7 / 11.4	
Elongation, %	D5035-11	21.5	29.9	
Abrasion Resistance (CS10/500 cycles with no added weight)	D3884-09	No Exposure of Core Yarn		
Flammability Rating		CA TB 117-2013		
Weatherability, 1200 hours	G154	Trace Discoloration		
Mildew Resistance	G21-13	No Growth		
Thickness, inches/mm	D1777-96	0.022" / 0.5588mm		

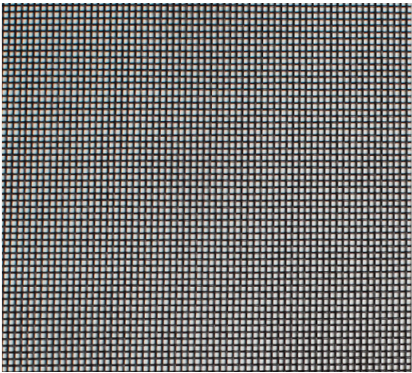

SHADES BY MATISS

www.shadesbymatiss.com | T. 800 493 2040 | email: info@shadesbymatiss.com