

GAPOSA

Motorized Systems for Interior Shades

Gaposa offers an innovative and simple line of completely battery-powered WireFree motors. The WireFree motors are available with a variety of power and control options and easily integrate with home automation systems.

GAPOSA Super Sileo 30



Gaposa Super Sileo 40




GAPOSA Super Sileo 50



GAPOSA SILEO 40 Mechanical

Limit

**30 Series**

ELECTRONIC ENCODED TUBULAR MOTORS WITH BUILT-IN RADIO RECEIVER

- Easy and intuitive limit setting using an allen key
- Compatible with the range of control units for residential applications
- Superior quality backed by 5 year warranty

40 Series

ELECTRONIC ENCODED TUBULAR MOTORS WITH BUILT-IN RADIO RECEIVER

- Easy and intuitive limit setting using an allen key Compatible with the range of control units for residential applications
- Superior quality backed by 5 year warranty

50 Series

ELECTRONIC ENCODED TUBULAR MOTORS WITH BUILT-IN RADIO RECEIVER

- For indoor/outdoor use
- Easy and accurate limit setting via transmitter
- Plug-in cable
- Compatible with climatic sensors

40 Series ML

MECHANICAL LIMIT SWITCH TUBULAR MOTORS

- Easy and intuitive limit setting using an allen key
- Compatible with the range of control units for residential applications
- Plug-in cable

Specifications	Motor	Description	Voltage	Torque	Speed	Sound level	Minimal shade width	Max shade size	Tubes	Control technology
Battery Extra Quiet	GA BT R 30 1.1 xQ	SuperSileo Li-ion XS 30 1.1 Nm	12V	1.1 Nm	30 RPM	~36 dB	23"	84" x 84"	1.5", 2.0"	Radio
Battery Extra Quiet	GA BT R 30 2.0 xQ	SuperSileo Li-ion XS 30 2.0 Nm	12V	2.0 Nm	22 RPM	~38 dB	23 3/4"	120" x 120"	1.5", 2.0"	Radio
Low Voltage Extra Quiet	GA DC R 30 2.0 xQ	SuperSileo Li-ion 30 2 Nm DC 24v	24V	2.0 N.m	28 RPM	~38 dB	16 5/8"	120" x 120"	1.5", 2.0"	Radio
Low Voltage Extra Quiet	GA DC R 50 4.0 xQ	SuperSileo 50 4 Nm DC 24V	24V	4.0 Nm	28 RPM	~34 dB	23 1/4"	144" x 144"	2" ZMC, 2.5", 3.25"	Radio
Low Voltage Extra Quiet	GA DC R 50 8.0 xQ	SuperSileo 50 8 Nm DC 24V	24V	8.0 Nm	15 RPM	~34 dB	23 1/4"	168" x 168"	2" ZMC, 2.5", 3.25"	Radio
Line Voltage Quiet	GA AC WT 40 Q	Sileo 40 Line Volt- age Wired Control	110V	4.0 Nm	30 RPM	~40 dB	22 1/2"	144" x 144"	2.0", 2" ZMC, 2.5"	Wired control (WT)
Line Voltage Quiet	GA AC WT E 40 Q	Sileo 40 Electronic limits Line Voltage Wired Control	110V	4.0 Nm	30 RPM	~40 dB	26"	144" x 144"	2.0", 2" ZMC, 2.5"	WT/electronic limits
Line Voltage Quiet	GA AC R 40 Q	Sileo 40 Line Voltage	110V	4.0 Nm	30 RPM	~40 dB	26 1/2"	144" x 144"	2.0", 2" ZMC, 2.5"	Radio
Line Voltage Extra Quiet	GA AC R 40 xQ	SuperSileo 40 Line Voltage	110V	4.0 Nm	34 RPM	~40 dB	26 1/2"	144" x 144"	2.0", 2" ZMC, 2.5"	Radio
Line Voltage Quiet	GA AC R 50 xQ	SuperSileo 50 Line Voltage	110V	5.0 Nm	25 RPM	~36 dB	23 1/4"	168" x 168"	2" ZMC, 2.5", 3.25"	Radio



GAPOSA

Motorized Systems for Interior Shades

DEDUCTIONS

Motor	Description	Valance	Inside Mount	Outside Mount	Recommended Tube Size
GA BT R 30 1.1 xQ	SuperSileo Li-ion XS 30 1.1 Nm	-	-1.375"	-1.25"	1.5", 2.0"
GA BT R 30 2.0 xQ	SuperSileo Li-ion XS 30 2.0 Nm	Cassette 100/120	-1.625"	-1.5"	
GA DC R 30 2.0 xQ	SuperSileo Li-ion 30 2 Nm DC 24V	Fascia 3, Fascia 4	-1.375"	-1.25"	
		Fascia 5	-1.625"	-1.5"	
GA AC WT 40 Q	Sileo 40 Line Voltage Wired	-	-1.5"	-1.375"	2 ZMC, S45, 2.0", 2.5"
GA AC WT E 40	Sileo 40 Electronic Limits Line Voltage Wired	Cassette 100/120	-1.75"	-1.625"	
GA AC R 40 Q	Sileo 40 Line Voltage	Fascia 3, Fascia 4	-1.5"	-1.375"	
GA AC R 40 xQ	SuperSileo 40 Line Voltage				
GA DC R 50 4.0 xQ	SuperSileo 50 4 Nm DC 24V	-	-1.5"	-1.375"	2 ZMC, 2.5", 3.25"
GA DC R 50 8.0 xQ	SuperSileo 50 8 Nm DC 24V	Cassette 120	N/A	N/A	
GA AC R 50 xQ	SuperSileo 50 Line Voltage	Fascia 3, Fascia 4	N/A	N/A	
		Fascia 5	-1.75"	-1.625"	



GAPOSA Controllers and Accessories

MOTORIZATION | GAPOSA



The *Emitto SMART LINE* is a range of handheld and wall mount transmitters. Emitto SMART LINE is easy to pair and to use. With the simple touch of a button one or more channels can be selected.



QCTZ01H Portable - 1 Channel
QCTZ02H Portable - PRESET / ALL
QCTZ04H Portable - TILTING
QCTZ01D Wall-mounted Dekora - 1 Channel
QCTZ04D Wall-mounted Dekora - TILTING
QCTZ02D Wall-mounted Dekora- PRESET / ALL



QCTZ01W Wall-mounted - 1 Channel
QCTZ04W Wall-mounted- TILTING
QCTZ02W Wall-mounted - PRESET / ALL

Technical details

Channels	1 to 5
Frequency	434.15 MHz
Power supply	3V mod. CR2032
Battery life	2 years
Radiated power	0,150 mW
Protection rate	IP40
Coverage (int/ext)	65 / 600 ft
Encoding	RC Gaposa
Working temperature	14°F / 104°F



A 16 channel remote with LCD display. Smart16 is the most sophisticated remote of all the range with a unique easy set up procedure and the most user friendly operation found in the market. A simple touch will select what to control between individual channels and groups.

Features:

- 16 channels for individual control
- Possibility to create and control 8 custom groups in addition to all channels
- Hide the unused channels
- Magnetic wall mount bracket



QCZTAB is a portable surface-mounted transmitter with interchangeable frame. It is available in 2 versions: single channel or four channels.

QCZTAB

1 channel transmitter



QCZTAB4

4 channels transmitter



Technical details

Channels	90
Frequency	434.15 MHz
Power supply	3V - CR2450
Battery life	2 years
Radiated power	0,150 mW
Protection rate	IP40
Coverage (int/ext)	65 / 600 ft
Encoding	RC Gaposa
Working temperature	14°F / 104°F
Dimensions	1.85x4.92x0.70 in
Weight	0.14 lb

ACCESSORIES

BC312.US
Li-Ion battery charger

Motors
XSDC3E220B
XSDC3E2030B



TRAS.120
Switching power supply 2,5 Amps

Motors
XSDC5E2815
XSDC5E2428



FLAX13W070
Plug-in power cable for X550 motor without dry contacts



TRASDC3.120
Switching power supply 2 Amps

Motors
XSDC3E2128
XSDC3E2228



FLAX14W007.L1 (6.102 in)
FLAX14W007.L2 (4.803 in)
FLAX14W007.L3 (9.606 in)
Power cord extension with plugs (for DC battery motors)



FLAX13W065
Power cable for X550 motor with dry contacts



QCTX01KW **QCTX01KB**




Emitto K Smart - the Soft touch

Sleek, longer ergonomic handheld remote combining elegant design and durability. A body made from an ionomer resin resistant to drops with a "Soft touch" feel is available in translucent, white, and black.



GAPOSA Controllers and Accessories

MOTORIZATION | GAPOSA

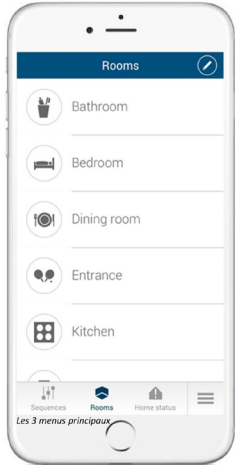

- App to control Gaposha shades, screens, roller shutters and lights
- 3 types of scenarios for an ultra simple set up
- Vacation scenario with random feature
- Designed for Smartphone, tablets or PC
- Free remote access without any subscription Autonomous server – does not use Cloud technology
- Information securely stored locally
- Simple and fast installation
- No limits to the number of scenes and connected devices


3 main menus for an easy control of the house: Scenarios, Rooms and House State

- No necessary set up: plug & play
- Wired for a faster data transfer
- Weekly automatic firmware updates
- Autonomous server – does not use Cloud technology
- Information securely stored locally
- Simple and fast installation
- No limits to the number of scenes and connected devices
- Possibility to add Zwave and ZigBee technology



GAPOSA SileoXS 50 DC ULTRA QUIET MOTOR


ARM5 CONTROL AND POWER DISTRIBUTION

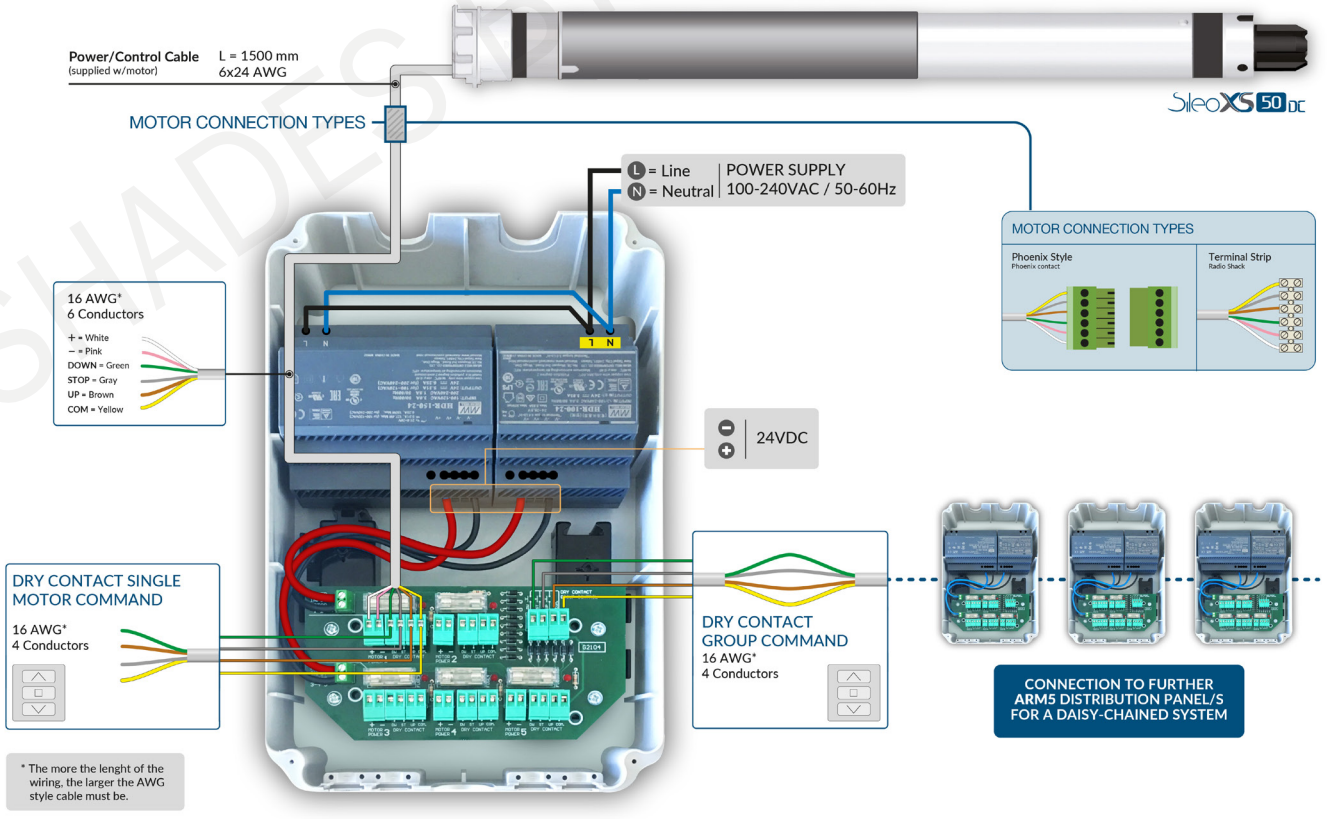




Sileo motors line voltage 120V 60Hz

Sileo motors are available with radio built-in (3 wires power cord) to be controlled via RF through a remote and without radio for connection with wall switch.

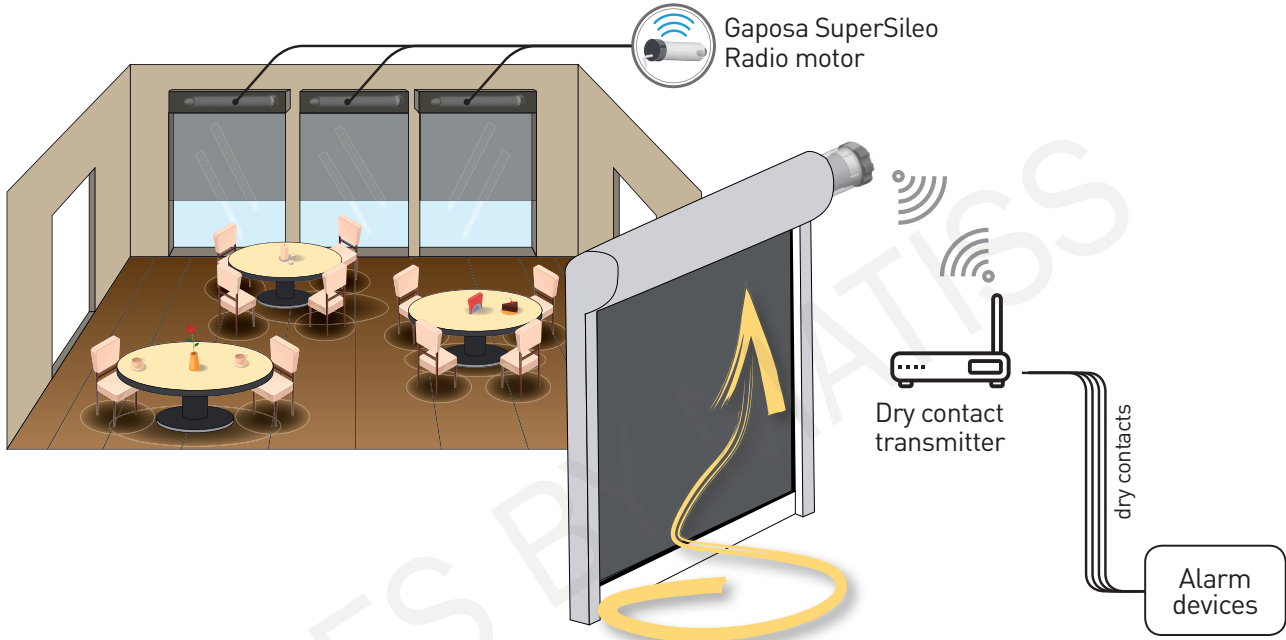

In addition to standard non radio motors Gaposa offers a unique technology of 4 wires electronic encoded motors

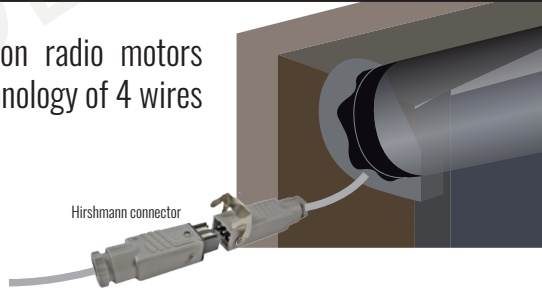

Four motors, with electronic limit switch, activated together with one pushbutton.

