

**Skyline 3.0Nm Li-ion | 35mm**

The motorized Skyline roller shade system offers a range of four Automate motors with one tube diameter to suit a variety of applications. Featuring ARC (Automate Radio Communication), the 35mm Skyline Automate system provides an intelligent, Li-ion battery or a DC powered solution.

**AESTHETIC FEATURES**


- Slim motor head for minimal light gap

**ASSEMBLY / PRODUCTION FEATURES**

- Greater flexibility with installation with spring loaded pin end
- Crown, drive and adapters available to suit variety of applications

**FUNCTIONAL BENEFITS**

- Leveling control
- Simple limit setting and adjustment
- Favorite position
- 3 operational speed settings
- 2-way RF communication
- ARC protocol for simple programming

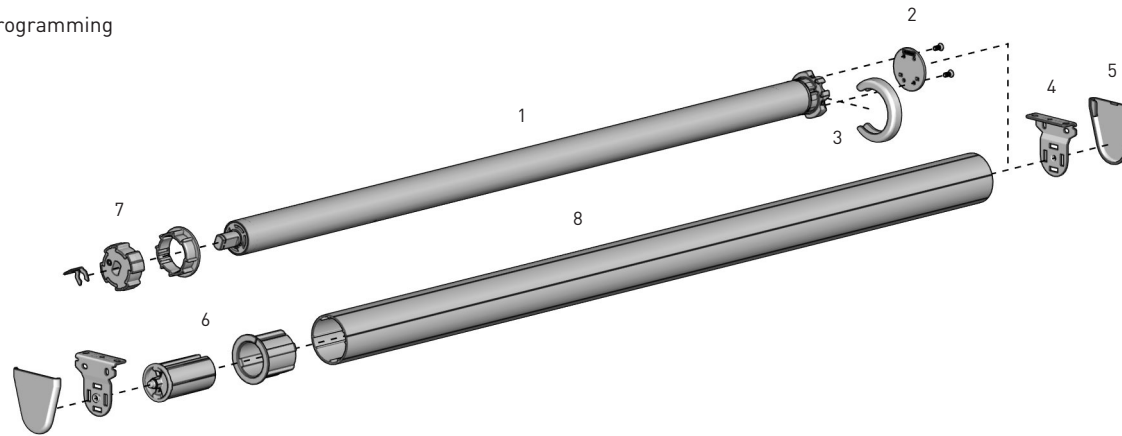


**SYSTEM INDEX**

	Automate Motor   35mm
	MTDCBRF35-3 - Wire-free Li-ion 3 Motor
1	MTDCRF35-3 - DCRF 3.0
	MTACRF35-6 - ACRF 6
	MTACQRF35-6 - ACRF Q6
2	Motor Adaptor + Screws MTAD-252835-SL
3	Motor Cap MTCAP35xx + SLAMSCREW
4	Skyline Brackets SLB###x SLNB###x
5	Skyline Bracket Covers SLBC###x SLNBC###x
6	Pin End & Adaptor SLPEHD53xx + RA2
7	Crown and Drive Kit MTCRDR-35-2
8	Aluminum Tube RTEA5T## - 2" tube

# - Size  
xxx= Color

**COLOUR RANGE**



**SYSTEM UPGRADES**


- CASSETTE 80/100/120
- FASCIA 3"/4"/5"
- LINK SYSTEM
- POCKETS 3"/4"/5"/6"

**CONTROL OPTIONS      CHARGERS      PRODUCT OPTIONS**

<p><b>REMOTES</b></p>	<p><b>WALL SWITCH</b></p>	<p><b>SMART HOME</b></p>	<p><b>PULSE</b></p>	<p><b>ELECTRIC</b></p>	<p><b>SOLAR</b></p>	<p><b>SUN SENSOR</b></p>
-----------------------	---------------------------	--------------------------	---------------------	------------------------	---------------------	--------------------------


SPECIFICATIONS

DEDUCTION CHART

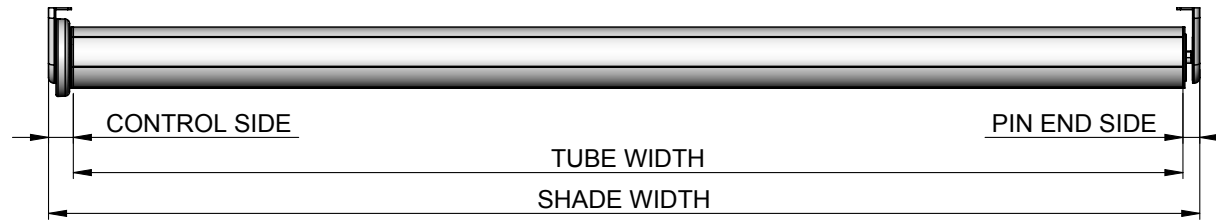


MOTOR	BRACKETS	PIN END	CONTROL SIDE	OVERALL DEDUCTION
MTDCBRF35-3 MTDCRF35-3	With Bracket Covers	0.55" [14mm]	0.79" [20mm]	1.34" [34mm]
MTACRF35-6 MTACRF35-6	No Bracket Covers	0.51" [13mm]	0.75" [19mm]	1.26" [32mm]

MAX ROLL



BRACKET	MAX ROLL SIZE
SLNBxx650xx	2-3/8" [59mm]
SLxx660xx	3" [76mm]
SLxx680xx	4" [102mm]
SLxx690xx	5" [128mm]

TUBE SPECS.




2.0" Tube

Code: RTEA5T12 (with tape)  
RTEA5U12  
RETA5T16(with tape)  
RTEA5U16  
OD: 2.0" [51mm]  
Length: 12', 16'  
[3.66m, 4.88m]

MAX DROP
2.0" TUBE
4.59' [1.40m]**
13.12' [4.00m]*

\* Recommended Max Drop. Exceeding this value may cause fabric tracking issues  
\*\* SLxx650xx ONLY

3.0m SYSTEM CAPACITY

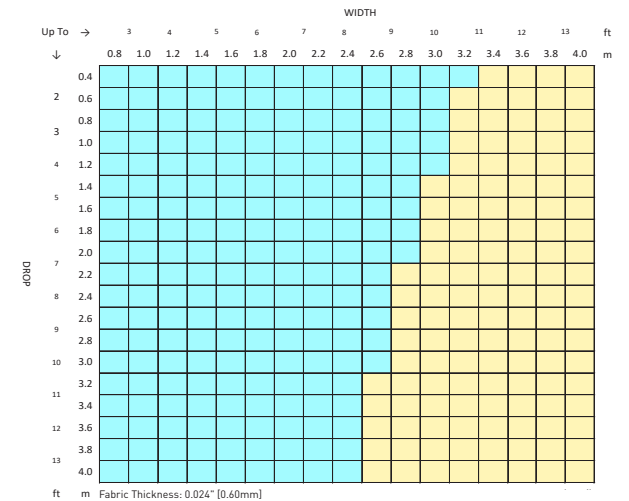

Fabric Thickness: 0.024" [0.60mm]  
Fabric Density: 12.39oz/yd<sup>2</sup> [420gsm]  
Weight Bar: D30 Silent Medium Aluminium Bottom Rail

CONTROL	TUBE	LINK SYSTEM
35mm Tube	RTEAST## - 2.0"	