


Eclipse Blackout

Eclipse Blackout combines the functionality and durability of a typical solar screen with the privacy of a 100% blackout fabric. Featuring Sanitized®, Eclipse Blackout inhibits the development of bacterial odors as well as the growth of mold and mildew on your fabric. Easy to weld and easy to clean, Eclipse Blackout provides a practical solution for any residential or commercial interior space.

FEATURES

- 100% blackout solar screen
- Easy to clean
- Waterproof
- Flame Retardant to NFPA 701
- Easy to weld for internal hem bars, no tape required
- Color matched back makes it ideal for open roll systems
- GREENGUARD Gold Certified for low VOC emissions

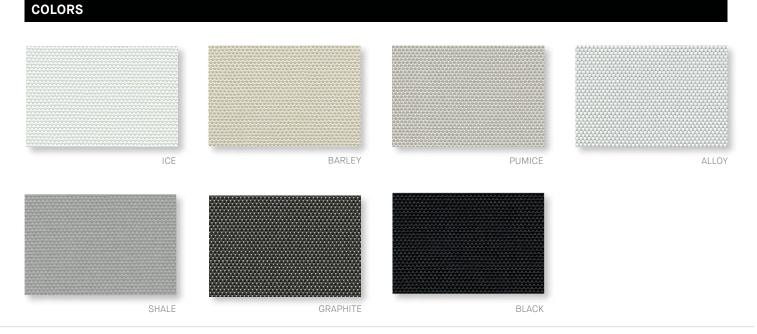

Bringing Fabrics to Life USA | AUSTRALIA | EUROPE texstyle.com



ECLIPSE BLACKOUT

Solar Screen



SPECIFICATIONS

	Blackout				
Composition	25% Polyester, 75% PVC				
Weight	16.96 oz/yd² (575g/m²)				
Thickness	0.027in (.69mm)				
Light fastness	Grade 4 (AATCC 16)				
Average length	30 yd/roll (27.4m)				
Width	118" (3m)				
Cutting	Knife, Crush, Ultrasonic				
Welding	No Tape. 248°F (120°C) to 284°F (140°C), Test First				
Railroadable	Not Recommended				
Cleaning	Wipe clean with warm soapy water and damp cloth				
Fire Classifications	NFPA 701				
Acoustical Performance	NCR 0.10 SAA 0.11				
Environmental Standards	GREENGUARD Gold, Health Product Declaration, OEKO-TEX Standard 100, ISO 14001				

SOLAR PROPERTIES

COLOR	THERMAL FACTORS			OPTICAL FACTORS		FABRIC & GLASS	
	Rs	As	Ts	Rv	Τv	SHGC % Improvement	SHGC
Ice	65	35	0	73	0	64	0.13
Alloy	61	39	0	65	0	61	0.16
Barley	58	42	0	61	0	60	0.17
Pumice	50	50	0	54	0	57	0.20
Shale	30	70	0	34	0	50	0.26
Graphite	9	91	0	10	0	43	0.17
Black	3	97	0	4	0	41	0.35

